



| DIFFERENTIAL | | 4±2°C |
|-----------------------------|--|----------|
| MAX TEMPERATURE IN THE BOX | | 100 °C |
| MIN TEMPERATURE IN THE BULB | | -10 °C |
| MAX TEMPERATURE IN THE BULB | | 100°C |
| DIELECTRIC RIGIDITY | | 2000v 1s |

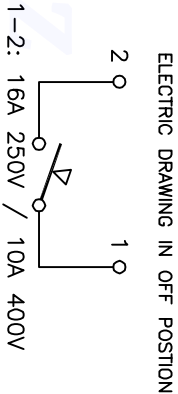


REGULATION


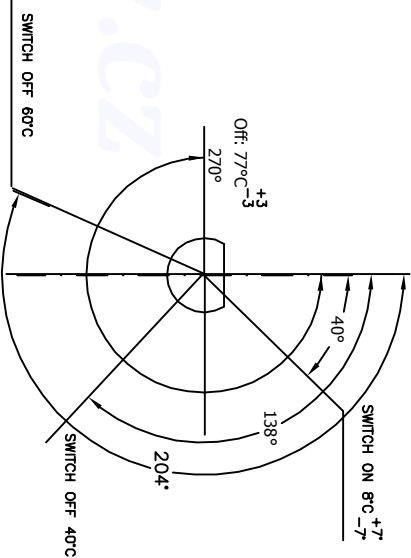


NOTE: 1.-THE INDICATED VALUES ARE ACCORDING TO THE DISCONNECTION TEMPERATURES
2.-THE THERMOSTAT WITH THE BULB AT 4°C AND 0° < WILL BE DISCONNECTED

| | |
|---------------|------------|
| EIKA | 81381509.6 |
| CUSTOMER Ref. | EIKAV01 |
| CUSTOMER | |

| | | | |
|----|-----------------------------------|-------|--------------|
| 6 | Black insulation PVC sleeve | 04/15 | |
| 5 | White insulation sleeve | 12/14 | |
| 4 | Increased sleeve lenght 550 mm | | |
| 1 | Increased capillary lenght 580 mm | | |
| 2 | Two contacts+modified marking | | |
| 3 | Increased capillary lenght 650 mm | 5/10 | Egilea |
| N. | Aldaketaren azalpena | Date | Adamec 03/10 |

| | | | |
|---|---------------------|----|----------|
|  | ELECTRIC THERMOSTAT | N° | 81381509 |
|---|---------------------|----|----------|

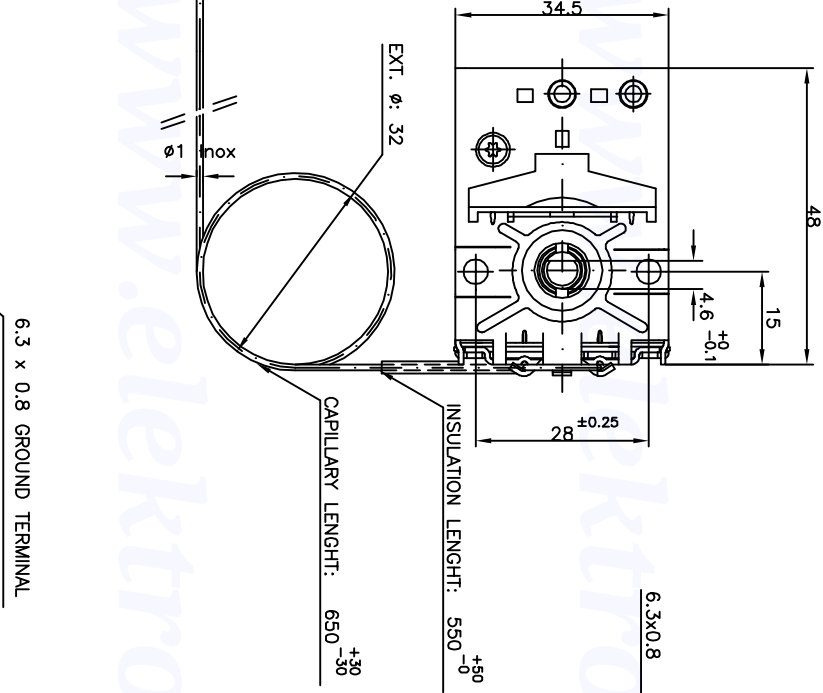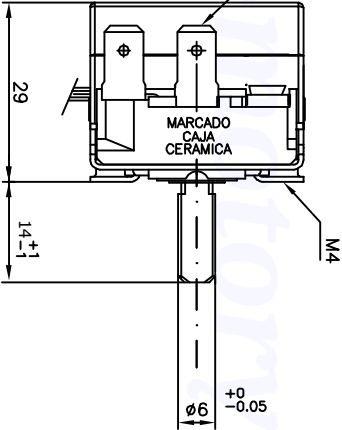

| Rotation | Torque |
|-------------|------------|
| 0°-5° | 2 - 8 Ncm |
| 5°-270° | 2 - 8 N.cm |
| <0° / >270° | > 250 N.cm |

| | |
|------------------------|------------|
| Plastic cover colour | Black |
| Cap. insulation colour | Black PVC |
| buztirkia | berria PVC |



APPROVALS

Při výrobě otočit shaft
do maximální pozice
!!!