



M16x1,5
Klemmbereich 4-8mm

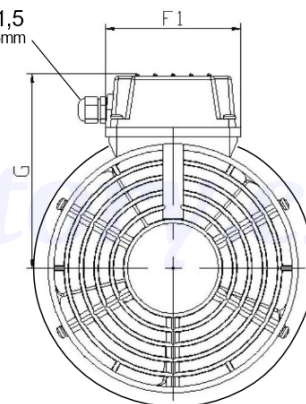

A	B	C	D	E	E1	F	F1	G	m[kg]
360	35	151	395	10	17	105	105	210	20,85

		IP66	CLASS:F			TYPE:FBC200			No:						
		S1													
		50Hz							60Hz						
		U[V]	I[A] max	P[W] max	n[min^{-1}] max	p[Pa]	LpA[dB]	Q[m ³ /h]	U[V]	I[A] max	P[W] max	n[min^{-1}] max	p[Pa]	LpA[dB]	Q[m ³ /h]
μF	1-1	230-277	0.64	73	1450				220-277	0.57	88	1750			
	3-Δ	200-303	0.88	98	1450	65	72	1679	220-332	0.66	117	1750			
	3-Y	346-525	0.46	98	1450	65	72	1679	380-575	0.35	117	1750	78	85	2026

Designed by	Checked by	Approved by	Date	Date	
				23.05.2018	
Y2-200; Y2HE-200; Y2PE200			FBC200		
Fremdbelüftung_FBC200			Edition	Sheet	
				1 / 1	