
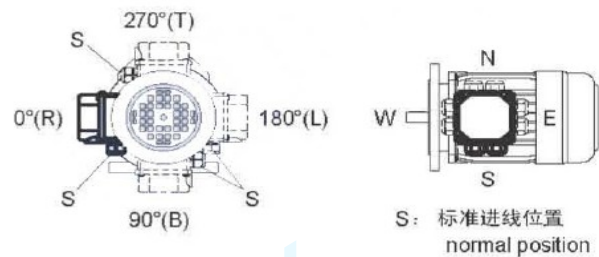
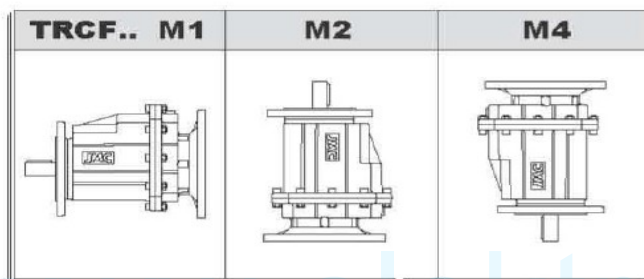


MOUNTING POSITION AND TERMINAL BOX ORIENTATION

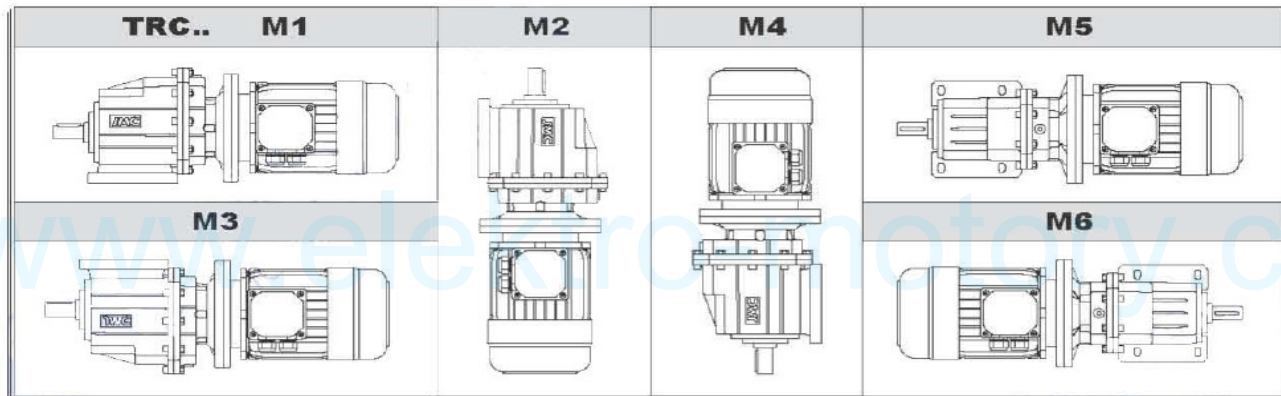

LUBRICATION

Types of lubrication

| | | | | | | lubrication type |
|--------------|---------------------|-------------------|--------------------|------------------|----------------------|------------------|
| TRC.. | Standard -10 to +40 | VG 220 | Shell Omala 220 | Mobilgear 630 | BP Energol GR-XP 220 | Mineral oil |
| | -20 to +25 | VG 150 VG 100 | Shell Omala 100 | Mobilgear 627 | BP Energol GR-XP 100 | |
| | -30 to +10 | VG 68-46 VG 32 | Shell Tellus T 32 | Mobil D.T.E. 13M | | |
| | -40 to -20 | VG 22 VG 15 | Shell Tellus T 15 | Mobil D.T.E. 11M | BP Energol HLP-HM 15 | |
| | -40 to +80 | VG 220 | Shell Omala HD 220 | Mobil SHC 630 | | Synthetic oil |
| | -40 to -40 | VG 150 | Shell Omala HD 150 | Mobil SHC 629 | | |
| | -40 to +10 | VG 32 | | Mobil SHC 624 | | |

LUBRICATION

Lubricant fill quantity

| Gear units | Fill quantity in liters | | | | | | unit: (L) |
|------------|-------------------------|-----|-----|-----|-----|-----|-----------|
| | M1 | M2 | M3 | M4 | M5 | M6 | |
| TRC..01.. | 0.4 | 0.6 | 0.4 | 0.3 | 0.3 | 0.3 | |
| TRC..02.. | 0.5 | 0.7 | 0.5 | 0.4 | 0.4 | 0.4 | |
| TRC..03.. | 0.8 | 1.1 | 0.8 | 0.6 | 0.6 | 0.6 | |
| TRC..04.. | 1.2 | 1.6 | 1 | 1 | 0.9 | 0.9 | |