



## MY 230V 2p. 50Hz. 3000 ot/min

Typ	výkon		otáčky	prúd	účinnosť cos	rozbehový prúd	Mr	Mm	Parametre kondenzátora práce	Hlučnosť LwA	váha	
	kW	Hp										
MY 56 1-2	0.09	0.12	2760	0.79	54	0.92	3	0.65	1.6	4 µF / 450 V	67	2.9
MY 56 2-2	0.12	0.16	2770	0.98	58	0.92	4	0.65	1.6	6 µF / 450 V	67	3.2
MY 56 3-2	0.18	0.25	2780	1.42	60	0.92	5	0.65	1.6	10 µF / 450 V	69	3.5
MY 63 1-2	0.18	0.25	2780	1.33	62	0.95	5	0.60	1.7	10 µF / 450 V	70	4
MY 63 2-2	0.25	0.37	2780	1.76	65	0.95	7	0.60	1.7	12 µF / 450 V	70	4.5
MYT 71 1-2	0.37	0.50	2700	2.61	65	0.95	10.44	0.60	1.7	16 µF / 450 V	75	5.1
MYT 71 2-2	0.55	0.75	2700	3.66	68	0.96	15.60	0.70	1.7	20 µF / 450 V	75	7.2
MYT 80 1-2	0.75	1.0	2760	4.73	71	0.95	20	0.70	1.8	25 µF / 450 V	75	9.8
MYT 80 2-2	1.1	1.5	2720	6.73	72.5	0.98	26	0.65	1.7	35 µF / 450 V	78	11.3
MYT 90S-2	1.5	2.0	2800	8.87	75	0.98	38	0.6	1.8	45 µF / 450 V	80	15
MYT 90L-2	2.2	3.0	2800	12.8	76	0.98	58	0.6	1.7	60 µF / 450 V	80	17.6
MYT 100L-2	3	3.0	2800	17.4	76.5	0.98	81.5	0.5	1.8	80 µF / 450 V	83	25.5

## MY 230V 4p. 50Hz. 1400 ot/min

MY 56 1-4	0.06	0.08	1360	0.59	48	0.92	2.5	0.75	1.6	4 µF / 450 V	63	3.5
MY 56 2-4	0.09	0.12	1370	0.83	51	0.92	3	0.75	1.6	6 µF / 450 V	63	3.8
MY 63 1-4	0.12	0.16	1380	1.03	55	0.92	3.5	0.65	1.6	10 µF / 450 V	65	4
MY 63 2-4	0.18	0.25	1390	1.49	57	0.92	5.5	0.65	1.5	12 µF / 450 V	65	4.6
MYT 71 1-4	0.25	0.37	1320	1.97	60	0.92	7.88	0.70	1.5	16 µF / 450 V	65	5.7
MYT 71 2-4	0.37	0.50	1320	2.91	60	0.92	11.66	0.70	1.5	20 µF / 450 V	68	6.7
MYT 80 1-4	0.55	0.75	1370	4.17	63	0.91	14	0.65	1.7	20 µF / 450 V	73	9.7
MYT 80 2-4	0.75	1.0	1370	5.1	67.3	0.95	18	0.63	1.65	30 µF / 450 V	73	11.7
MYT 90S-4	1.1	1.5	1350	7.59	68.5	0.92	27	0.55	1.7	40 µF / 450 V	75	15.5
MYT 90L-4	1.5	2.0	1370	9.64	72	0.94	35	0.55	1.7	45 µF / 450 V	78	17.5
MYT 100L 1-4	2.2	3.0	1400	14.05	74	0.92	60	0.45	1.8	70 µF / 450 V	80	26
MYT 100L 2-4	3	4.0	1400	17.83	77	0.95	76	0.45	1.7	90 µF / 450 V	80	32

### Montážní a celkové rozměry

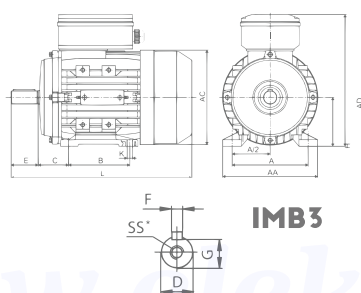

TYP	Montážne rozmery																				Celkové rozmery					
	B3										B5					B14										
	A	B	C	D	E	F	G	H	K	M	N	P	R	S	T	M	N	P	R	S	T	AA	AC	AD	HD	L
56	90	71	36	9	20	3	7.2	56	5.8	98	80	120	0	7	3.0	65	50	80	0	M5	2.5	108	115	156	100	192
63	100	80	40	11	23	4	8.5	63	7	115	95	140	0	10	3.0	75	60	90	0	M5	2.5	120	130	179	116	212
71	112	90	45	14	30	5	11	71	7	130	110	160	0	10	3.5	85	70	105	0	M6	2.5	132	145	194	123	240
80	125	100	50	19	40	6	15.5	80	10	165	130	200	0	12	3.5	100	80	120	0	M6	3.0	157	165	223	143	290
90S	140	100	56	24	50	8	20	90	10	165	130	200	0	12	3.5	115	95	140	0	M8	3.0	172	185	240	150	310
90L	140	125	56	24	50	8	20	90	10	165	130	200	0	12	3.5	115	95	140	0	M8	3.0	172	185	240	150	335
100L	160	140	63	28	60	8	24	100	12	215	180	250	0	15	4.0	130	110	160	0	M8	3.5	196	205	260	160	357